

Second Half 2018  
Semi-Annual Groundwater Monitoring Report  
Patchogue Former MGP Site  
NYSDEC Site No. 1-52-182  
Village of Patchogue, Suffolk County, New York

---

Prepared for  
National Grid USA  
Hicksville, New York  
March 2019

Second Half 2018  
Semi-Annual Groundwater Monitoring Report  
Patchogue Former MGP Site  
NYSDEC Site No. 1-52-182  
Village of Patchogue, Suffolk County, New York

---

Prepared for  
National Grid USA  
175 East Old Country Road  
Hicksville, New York 11801

March 2019

Project Number: 153021.780.005



Brown and Caldwell Associates  
2 Park Way, Suite 2A  
Upper Saddle River, New Jersey 07458

# Table of Contents

Appendices .....	i
List of Tables .....	ii
List of Figures .....	ii
1. Introduction.....	1-1
1.1 Background .....	1-1
2. Scope of Work.....	2-1
3. Results and Findings.....	3-1
3.1 Water Level Data.....	3-1
3.2 NAPL Gauging.....	3-1
3.3 Groundwater Quality Data .....	3-1
4. Summary and Conclusions .....	4-1
5. Recommendations .....	5-1
6. References.....	6-1

## Appendices

---

Appendix A	Field Sampling Data Sheets
Appendix B	Laboratory Data Report (CD-ROM)
Appendix C	Data Usability Summary Report
Appendix D	Electronic Data Deliverable (CD-ROM)

## List of Tables

---

Table 1. Water Elevations and NAPL Monitoring Data

Table 2. Groundwater Analytical Results

Table 3. Summary of Historical BTEX Concentrations

Table 4. Summary of Historical PAH Concentrations

## List of Figures

---

Figure 1. Water Table Elevation Contour Map – December 11, 2018

## Section 1

# Introduction

This Semi-Annual Groundwater Monitoring Report documents the implementation and summarizes the results of the groundwater monitoring activities conducted during the second half of 2018 at the Patchogue Former Manufactured Gas Plant (MGP) Site (hereinafter referred to as the “Site”). The groundwater monitoring activities included the performance of water level measurements, non-aqueous phase liquid (NAPL) gauging and groundwater sampling activities.

The groundwater monitoring event and the preparation of this report are part of the semi-annual routine groundwater monitoring program being conducted at the Site. This report has been prepared for submittal to the New York State Department of Environmental Conservation (NYSDEC) and includes the following:

- Description of the scope of the field activities, methods and procedures
- Table summarizing the results of the water level measurements and the gauging for the presence of NAPL in the monitoring wells and piezometers (see Table 1)
- Table summarizing the analytical results for the groundwater samples obtained during the December 2018 monitoring event including a comparison to the applicable groundwater quality criteria (see Table 2)
- Comparison of data from this monitoring period to data from historical monitoring events (Tables 3 and 4)
- Discussion of the results and findings from the groundwater monitoring data
- A water table elevation contour map depicting the generalized direction of groundwater flow based on groundwater elevation data obtained from monitoring wells and piezometers as well as surface water elevation data obtained from a staff gauge installed in the Patchogue River (Figure 1)
- Field Sampling Data Sheets (Appendix A)
- Laboratory Data Report (Appendix B)
- Data Usability Summary Report (Appendix C)
- Electronic Data Deliverable (Appendix D)

## 1.1 Background

Groundwater monitoring events have been conducted at the Site since March 2008, including two monitoring events conducted as part of the remedial investigation (RI) in March 2008 and July 2008. The groundwater monitoring event conducted in December 2018 is the subject of this report. The results of previous monitoring events have had, in general, consistent concentrations and areal distribution of constituents in groundwater. Prior to the March 2010 groundwater monitoring event, site-related dissolved phase constituents (e.g., benzene, toluene, ethylbenzene, isomers of xylene [BTEX] and polycyclic aromatic hydrocarbons [PAHs]) were detected at concentrations above the Class GA groundwater quality criteria (i.e., standards from the 6 NYCRR Part 703 Standards and guidance values from the Division of Water Technical and Operational Guidance Series [TOGS] 1.1.1) in a limited area near the center of the Site. These elevated concentrations did not extend downgradient to the wells closer to the Patchogue River. However, during the March 2010 and September 2010 monitoring events, detections of BTEX and PAH compounds were more widely distributed than during previous

events. It was surmised that this change was the result of a temporary dewatering operation at a construction project conducted by the Village of Patchogue at their wastewater treatment facility (WWTF) located directly across the river (east-southeast) from the Site. Based on the understanding of Site conditions, it was anticipated that when the dewatering operations ceased, contaminant concentrations in groundwater would re-equilibrate with steady-state (i.e., pre-dewatering) groundwater flow conditions, and eventually return to levels similar to those prior to dewatering. To confirm this, National Grid increased the frequency of the groundwater monitoring from semi-annually to quarterly. The subsequent six quarterly monitoring events documented the return of groundwater flow and groundwater quality to conditions consistent with those prior to the dewatering operations.

Based on this finding, in a May 24, 2012 email, National Grid proposed to the NYSDEC that the frequency of groundwater sampling and analysis return to a semi-annual basis with the schedule for water level monitoring and NAPL gauging remaining on a quarterly basis. NYSDEC agreed with this proposal. Collection of NAPL gauging and water level data remained on a quarterly schedule to provide additional water level data from the piezometers that had been installed in the first half of 2012 in support of the Pre-Remedial Design Investigation. Subsequently, in an October 8, 2013 letter to the NYSDEC, National Grid proposed that the frequency of all components of the groundwater monitoring program (i.e., water level measurements, NAPL gauging and groundwater sampling) be returned to the semi-annual schedule. This proposal was made because the data from the water level measurements and NAPL gauging, including data from the newer piezometers, continued to indicate very consistent findings from quarter to quarter and confirmed the understanding of groundwater flow conditions and NAPL occurrence at the Site. The NYSDEC concurred with this proposal in a December 9, 2013 email.

## Section 2

# Scope of Work

Field activities for the second half 2018 groundwater monitoring were conducted by Brown and Caldwell Associates (BC) on December 11 and 12, 2018. The activities conducted during this monitoring event are described below. Locations of the monitoring wells, piezometers, and staff gauges referenced below are depicted on Figure 1.

Prior to groundwater sampling, water level measurements and NAPL gauging was performed in the piezometers and monitoring wells associated with the Site. The level of the Patchogue River was measured at one of the two staff gauges (no measurement was made at staff gauge SG-1 as this surface water elevation control point was determined to be destroyed and no longer exists). Water level measurements and NAPL gauging were conducted using an electronic oil/water interface probe; measurements were made to the nearest 0.01 foot. At the locations where NAPL was detected using the oil/water interface probe, a 3-foot long threaded rod attached to a nylon mason line was lowered into the monitoring well or piezometer to confirm the presence of the NAPL. The threaded rod was lowered to the bottom of the monitoring well to measure the approximate thickness of the NAPL accumulation.

Groundwater sampling was conducted at 10 monitoring wells following the water level and NAPL gauging activities. Monitoring well MW-5 was not sampled during this monitoring period due to the presence of NAPL in this well. The presence of NAPL in this well is consistent with observations during previous gauging activities. The standard protocol is that if NAPL is observed in a well during gauging or sampling, groundwater samples are not submitted for laboratory analyses. Monitoring well MW-6 was not gauged for NAPL or sampled during this monitoring period because it could not be located due to recent construction activities on the Site which apparently resulted in covering of flush-mounted surface completion for well. As described in Section 5 (“Recommendations”), remediation activities will be conducted at the Site this year and MW-6 will be located and, along with other wells will in the remediation area, will be decommissioned during these activities. Groundwater sampling was conducted using low flow purging and sampling techniques in accordance with the United States Environmental Protection Agency (USEPA) protocol (USEPA, July 1996, Revised January 2010). Samples were submitted to Eurofins Lancaster Laboratories Environmental (Lancaster) located in Lancaster, Pennsylvania. Lancaster is certified (Certification No. 10670) through the New York State Department of Health (NYSDOH) Environmental Laboratory Approval Program (ELAP).

The groundwater samples were analyzed for: BTEX compounds and methyl tertiary-butyl ether (MTBE) using USEPA SW-846 Method 8260B, and PAHs using USEPA SW-846 Method 8270D. The selective ion monitoring (SIM) component of the 8270 analysis was also performed on the samples to obtain lower detection limits for certain PAH compounds. The groundwater samples were also analyzed in the field for pH, specific conductivity, temperature, turbidity, oxidation-reduction potential, and dissolved oxygen (see Appendix A for field data sheets).

The laboratory report from Lancaster is provided in Appendix B. Laboratory analytical data were provided to BC in electronic form by Lancaster and have been incorporated into the environmental database maintained by BC for the Site.

In addition to the samples described above, quality assurance/quality control (QA/QC) samples were also collected. The QA/QC samples included: trip blanks (one per cooler containing samples for BTEX and MTBE analysis), a field duplicate, and an equipment blank. Also, extra sample volume was collected

from one location to provide for matrix spike/matrix spike duplicate (MS/MSD) analysis. The trip blank sample was analyzed for BTEX and MTBE only. The other QA/QC samples were analyzed for BTEX, MTBE, and PAHs.

Laboratory results for the groundwater sample analyses were forwarded to a data validator, Meridian Consultant Group, Inc. of Annapolis, Maryland, for review and preparation of a Data Usability Summary Report (DUSR). The DUSR presents a summary of data usability including a discussion of qualified data. The DUSR is provided as Appendix C. As described in the DUSR, the data were considered by the validator to be valid and usable. An Electronic Data Deliverable (EDD) of the validated analytical data, prepared in accordance with NYSDEC requirements, is provided in Appendix D.



## Section 3

# Results and Findings

### 3.1 Water Level Data

Table 1 provides the water level data and calculated water elevations from the December 11, 2018 measurements. Figure 1 illustrates the elevation contours of the water table based on these data. The contours were developed using water level elevation data from the shallow monitoring wells and shallow piezometers at the Site (i.e., those with screens that straddle, or are just below, the water table) and one of the two surface water staff gauges (SG-2) in the Patchogue River. The surface water level was not measured at SG-1 and has been considered destroyed; the staff gauge will no longer be used as a surface water elevation control point. The water level elevations used for contouring are representative of water table elevations at the Site. The groundwater elevation (hydraulic head) values for the wells and piezometers screened in deeper intervals are also posted for reference on Figure 1. The water table is relatively shallow and is typically positioned in the fill that overlies the native alluvial deposits and outwash deposits. The water table contours indicate that lateral groundwater flow is from northwest to southeast across the Site toward the Patchogue River. Comparisons of the groundwater elevations in the monitoring wells to the river elevation, as measured at the staff gauges, demonstrate that groundwater elevations are higher than the river level indicating that groundwater is discharging to the Patchogue River. The upward vertical hydraulic gradient measured at well pairs adjacent to the river (well pairs MW-4S and MW-4D, and MW-9S and MW-9D) is indicative of a discharge area and provides further support to the conclusion that groundwater is discharging to the Patchogue River. The general configuration of the water table contours developed using the December 11, 2018 data, and the interpreted groundwater flow patterns, are consistent with those from previous rounds of water level measurements with one exception. The exception occurred during the March 2010 sampling event when the large-scale dewatering activities were being conducted on the WWTF site located east of the Site on the opposite side of the river (see discussion in Section 1.1). Operation of this dewatering system temporarily altered groundwater flow patterns and levels at the Site (see “Groundwater Monitoring Report, Second Semiannual 2010 Sampling Event” [GEI, November 2010]).

### 3.2 NAPL Gauging

Table 1 presents the results of the NAPL gauging conducted in the monitoring wells and piezometers associated with the Site during the December 2018 groundwater monitoring event. NAPL was identified in MW-5 and PZ-3A during the December 2018 gauging activities. Specifically, NAPL with a strong mothball-like odor was observed on the lower 0.2 feet of the threaded rod used to gauge the bottom of the well at MW-5 and 0.1 feet of black viscous NAPL was observed on the threaded rod at PZ-3A. NAPL has been observed in MW-5 and PZ-3A during previous gauging events. No other visible indications of the presence of NAPL were observed during the December 2018 gauging activities.

### 3.3 Groundwater Quality Data

Table 2 provides the results of the laboratory analyses of the groundwater samples collected during the December 2018 monitoring event and a comparison of the data to the New York State Class GA groundwater quality criteria. Comparisons of total BTEX and total PAH concentrations from this sampling event to previous sampling events are provided as Tables 3 and 4, respectively.

As previously stated, NAPL was identified in one monitoring well (MW-5) and one piezometer (PZ-3A) associated with the Site. This well and piezometer are located in the central part of the Site in the area of former MGP operations (refer to Figure 1). As discussed in Section 2, because MW-5 contained NAPL, groundwater samples were not collected from this location. Groundwater samples were collected from the remaining 10 monitoring wells and submitted to the laboratory for analysis.

The constituent concentrations in groundwater samples collected during the December 2018 monitoring event are consistent with those measured during previous monitoring events. No MTBE or BTEX compounds were detected at any of the 10 monitoring wells sampled during the December 2018 monitoring event.

PAH compounds were detected in samples collected from monitoring wells MW-1, MW-7D, MW-8S, MW-8D, MW-9S, and MW-9D at low concentrations (i.e., at or slightly above the laboratory method detection limit), but above the Class GA groundwater quality criteria, during the December 2018 monitoring event. The PAH compounds that were identified in the groundwater samples from these sampling locations at concentrations above the Class GA groundwater quality criteria include one or more of the following six compounds: benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, and indeno(1,2,3-cd)pyrene. These PAH compounds have very low aqueous solubilities, are not readily mobile in groundwater, and are unlikely to have migrated from the on-Site source area. Further, two of these wells, MW-1 and MW-7D, are located upgradient and sidegradient of the on-Site source area. The criteria that were exceeded for five of these six PAHs are unpromulgated guidance values rather than 6 NYCRR Part 703 standards. The criteria for the sixth PAH, benzo(a)pyrene, is a Part 703 standard. The standard for benzo(a)pyrene is “non-detect” and the guidance value for the other four PAHs, 0.002 µg/L, is approximately an order of magnitude below the method detection limit. Therefore, any detection of these compounds in groundwater will result in an exceedance. The detection of these constituents in the monitoring locations is likely related to the disturbance of fine or colloid sized particles during purging or sampling activities. These particles are derived from within the well or the soil adjacent to the well that become suspended into the water column of the well as a result of disturbance during purging and sampling activities.

## Section 4

# Summary and Conclusions

As noted in previous monitoring events, NAPL was identified in one monitoring well (MW-5) and one piezometer (PZ-3A) during the December 2018 event. MW-5 and PZ-3A are located in the center of the Site in the area of former MGP operations where NAPL has been identified in the soil; this area will be addressed by planned future remedial action as described in the “Remedial Design Report (90-95% Submission), Patchogue Former MGP Site” (BC, February 2018).

No MTBE or BTEX compounds were detected in groundwater samples from the 10 monitoring wells sampled during the December 2018 monitoring event.

At MW-1, MW-3, MW-7D, MW-8S, MW-8D, MW-9S, and MW-9D, one or more PAH compounds were detected at low concentrations (i.e., at or slightly above the laboratory method detection limit) above the Class GA groundwater quality criteria during the December 2018 monitoring event. The detected PAH compounds have very low aqueous solubilities, are not readily mobile in groundwater and are unlikely to have migrated from the on-Site source area. Further, two of these wells, MW-1 and MW-7D, are located upgradient and sidegradient of the on-site source area. In addition, the criteria that were exceeded for five of the six detected PAHs are unpromulgated guidance values rather than Part 703 standards. The criteria for these compounds are extremely low, approximately an order of magnitude below the laboratory method detection limit. Therefore, any detection of these compounds in groundwater will result in an exceedance.

## Section 5

# Recommendations

Implementation of remedial activities at the Site are scheduled to begin in Summer 2019. Eleven of the wells and piezometers will be decommissioned at the beginning of these activities. National Grid proposes to suspend the semi-annual groundwater monitoring program for 2019. Groundwater monitoring will be conducted after remedy implementation is complete in accordance with the requirements of the Remedial Design Report.

## Section 6

# References

Brown and Caldwell Associates, February 2018, Remedial Design Report (90-95% Submission), Patchogue Former MGP Site, Village of Patchogue, Suffolk County, New York, Site ID No. 1-52-182.

Brown and Caldwell Associates, December 2012, Construction Completion Report Utility Corridor Work Plan Implementation, Patchogue Former MGP Site, Village of Patchogue, Suffolk County, New York, Site ID No. 1-52-182.

GEI, November 2010. Groundwater Monitoring Report, Second Semiannual 2010 Sampling Event, Patchogue Former MGP Site, Town of Brookhaven, Suffolk County, Long Island, New York, Site ID No. 1-52-182.

USEPA, July 1996; Revised January 2010. Low-Stress (low flow) Purging and Sampling Procedure for the Collection of Groundwater Samples from Monitoring Wells.

## Tables

---



**TABLE 1**  
**WATER ELEVATIONS AND NAPL MONITORING DATA**  
**SECOND HALF 2018 SEMI-ANNUAL GROUNDWATER MONITORING EVENT**  
**PATCHOGUE FORMER MGP SITE**  
**PATCHOGUE, NEW YORK**

Location ID	12/11/2018					Remarks
	Top of Casing Elevation <sup>(a)</sup> (ft., NAVD)	Depth to Water (ft., BTOC)	Water Elevation (ft., NAVD)	Depth to NAPL (ft., BTOC)	Total Depth of Well (ft., BTOC)	
MW-1	11.47	5.44	6.03	NI	15.25	
MW-3	5.56	2.03	3.53	NI	10.36	
MW-4S	7.97	4.78	3.19	NI	12.28	
MW-4D	7.79	4.53	3.26	NI	26.78	
MW-5	8.66	4.29	4.37	16.50	16.70	NAPL with a strong mothball-like odor observed on the lower 0.2 feet of the threaded rod used to gauge the bottom of the well.
MW-6	5.03	NM	--	NM	NM	Unable to locate.
MW-7S	8.45	4.12	4.33	NI	12.44	
MW-7D	8.31	4.01	4.30	NI	28.13	
MW-8S	5.08	0.47	4.61	NI	9.92	Soft bottom.
MW-8D	4.98	0.36	4.62	NI	25.15	Soft bottom.
MW-9S	4.47	1.27	3.20	NI	10.25	
MW-9D	4.66	1.12	3.54	NI	22.92	
PZ-1A	8.05	3.28	4.77	NI	10.00	
PZ-1B	8.91	4.22	4.69	NI	22.55	
PZ-2A	8.77	4.11	4.66	NI	8.03	
PZ-2B	8.29	3.53	4.76	NI	18.03	Strong mothball-like odor observed on oil/water interface probe.
PZ-3A	8.78	4.58	4.20	8.85	8.95	Black viscous NAPL observed on the lower 0.1 feet of the threaded rod used to gauge the bottom of the well.
PZ-3B	8.90	4.80	4.10	NI	21.24	
PZ-4A	4.79	1.48	3.31	NI	4.92	
SG-1	5.23	NM	--	--	NA	Unable to locate, presumed to be destroyed.
SG-2	5.17	3.51	1.66	NI	NA	

**Notes:**

NAVD - North American Vertical Datum 1988

ft. - Feet

ppm - parts per million

BGS - Below Ground Surface

BTOC - Below Top of Casing

NAPL - Non-Aqueous Phase Liquid

PID - Photoionization Detector

PVC - Polyvinyl chloride

NA - Not Applicable

NI - NAPL not Indicated by Oil/Water Interface Probe

NM - Not measured

MW - monitoring well

PZ - piezometer

SG - staff gauge

(a) - Monitoring wells resurveyed on 7/3/12 following utility corridor construction activities. See "Construction Completion Report, Utility Corridor Work Plan Implementation" (Brown and Caldwell, December 2012). Above ground casing at MW-5 was lowered during utility corridor construction activities and was

**TABLE 2**  
**GROUNDWATER ANALYTICAL RESULTS**  
**SECOND HALF 2018 SEMI-ANNUAL GROUNDWATER MONITORING EVENT**  
**PATCHOGUE FORMER MGP SITE**  
**PATCHOGUE, NEW YORK**

Class GA Groundwater Criteria				Loc ID	MW-1	MW-3	MW-3 DUP	MW-4S	MW-4D	MW-7S	MW-7D	MW-8S	MW-8D	MW-9S	MW-9D
TOGS 1.1.1	NYS Part 703														
Constituent	Guidance	Standard	Units	Date	12/11/2018	12/12/2018	12/12/2018	12/12/2018	12/12/2018	12/11/2018	12/11/2018	12/11/2018	12/12/2018	12/12/2018	12/12/2018
Volatile Organic Compounds (VOCs)															
BTEX Compounds															
Benzene	NE	1	µg/L		1.0 U	0.20 U	0.20 U	0.20 U	0.20 U	0.50 J	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U
Toluene	NE	5	µg/L		1.0 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U
Ethylbenzene	NE	5	µg/L		2.0 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U	0.40 U
Xylenes, Total	NE	NE	µg/L		5.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U	1.0 U
Total BTEX <sup>(a)</sup>	NE	NE	µg/L		ND	ND	ND	ND	ND	0.50 J	ND	ND	ND	ND	ND
Other VOCs															
Methyl Tertiary Butyl Ether	10	NE	µg/L		1.0 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U	0.20 U
Semi-Volatile Organic Compounds (SVOCs)															
Polycyclic Aromatic Hydrocarbons (PAHs)															
Acenaphthene	20	NE	µg/L		0.01 U	0.01 U	0.02 J	0.20	0.01 U	0.03 J	0.01 U	0.04 J	0.01 U	0.30	0.01 U
Acenaphthylene	NE	NE	µg/L		0.02 J	0.01 U	0.01 J	0.06	0.05	0.01 U	0.01 U	0.01 U	0.01 U	0.20	0.02 J
Anthracene	50	NE	µg/L		0.01 U	0.01 U	0.03 J	0.03 J	0.01 U	0.04 J	0.01 U	0.01 U	0.01 U	0.10	0.03 J
Benzo(a)anthracene	0.002	NE	µg/L		0.03 J	0.03 J	0.03 J	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.01 J	0.70	0.07
Benzo(a)pyrene	NE	0	µg/L		0.04 J	0.01 U	0.02 J	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.02 J	0.70	0.08
Benzo(b)fluoranthene	0.002	NE	µg/L		0.03 J	0.01 U	0.03 J	0.01 U	0.01 U	0.01 U	0.01 J	0.01 J	0.02 J	0.60	0.09
Benzo(g,h,i)perylene	NE	NE	µg/L		0.02 J	0.01 U	0.02 J	0.01 U	0.01 U	0.01 U	0.01 J	0.01 J	0.01 J	0.40	0.06
Benzo(k)fluoranthene	0.002	NE	µg/L		0.02 J	0.01 U	0.02 J	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.01 U	0.30	0.05 J
Chrysene	0.002	NE	µg/L		0.02 J	0.03 J	0.03 J	0.01 U	0.01 U	0.01 U	0.01 U	0.01 J	0.02 J	0.70	0.09
Dibenzo(a,h)anthracene	NE	NE	µg/L		0.02 U	0.02 U	0.02 U	0.02 U	0.02 U	0.02 U	0.01 J	0.02 U	0.02 U	0.10	0.02 U
Fluoranthene	50	NE	µg/L		0.03 J	0.70 J+	0.70 J+	0.02 J	0.01 U	0.01 U	0.01 J	0.01 J	0.02 J	1.0 J+	0.10 J+
Fluorene	50	NE	µg/L		0.02 J	0.01 U	0.02 J	0.02 J	0.03 J	0.01 J	0.01 U	0.01 U	0.01 U	0.10	0.02 J
Indeno(1,2,3-cd)pyrene	0.002	NE	µg/L		0.02 J	0.01 U	0.02 J	0.01 U	0.01 U	0.01 U	0.01 U	0.01 J	0.01 J	0.40	0.06
Naphthalene	10	NE	µg/L		0.03 J	0.03 U	0.08 J	0.03 U	0.03 U	0.03 U	0.03 U	0.03 U	0.03 U	0.10	0.03 U
Phenanthrene	50	NE	µg/L		0.03 U	0.03 U	0.06 J	0.03 U	0.03 U	0.03 U	0.03 U	0.03 U	0.03 U	0.20	0.08 J
Pyrene	50	NE	µg/L		0.03 J	0.70	0.70	0.90	0.01 U	0.01 U	0.01 J	0.01 J	0.02 J	2.0	0.20
Total PAHs <sup>(b)</sup>	NE	NE	µg/L		0.31 J	1.5 J	1.8 J	1.2 J	0.08 J	0.08 J	0.05 J	0.1 J	0.13 J	7.9	1.0 J

**Notes:**

BTEX - benzene, toluene, ethylbenzene and isomers of xylene.

U - The analyte was analyzed for, but was not detected above the sample reporting limit. Value shown is representative of method detection limit for the analyzed constituent.

J - Estimated concentration. The result is below the reporting limit but above the method detection limit.

J+ - Estimated concentration, biased high.

µg/L - micrograms per liter

ND - Not detected.

NE - Not established.

(a) - To calculate total BTEX concentration, a value of zero is used for non-detect values.

(b) - To calculate total PAH concentration, a value of zero is used for non-detect values.

Boxed concentrations are above New York State Class GA Groundwater Quality Criteria (Standards or Guidance values).



**TABLE 3**  
**SUMMARY OF HISTORICAL BTEX CONCENTRATIONS**  
**PATCHOGUE FORMER MGP SITE**  
**PATCHOGUE, NEW YORK**

Sampling Date	Total BTEX Concentrations (µg/L) <sup>(a)</sup>														
	Monitoring Well/Piezometer														
	MW-1	MW-2S	MW-2D	MW-3	MW-4S	MW-4D	MW-5	MW-6	MW-7S	MW-7D	MW-8S	MW-8D	MW-9S	MW-9D	PZ-4A
Mar-08	0	0	0	0	3.4	0	1016	57	NS	NS	NS	NS	NS	NS	NI
Jul-08	NS	0	0	0	0	0	678	0	0	0	0	0	0	0	NI
Mar-09	0	0	0	0	0	0	975	0	0	1	0	0	0	0	NI
Sep-09	0	0	0	0	0	0	1257	1	0	0	0	0	0	0	NI
Mar-10	0	0	0	0	0	0	637	2	0	9	0	0	0	0	NI
Sep-10	0	0	0	0	0	0	NS	0	0	0	0	0	27	0	NI
Jan-11	1.7	0	0	0	0	0	NS	NS	0	0	0	0	1	0	NI
Apr-11	0	0	0	0	0	0	NS	NS	0	0	0	0	0	0	NI
Aug-11	0	0	0	0	0	0	NS	NS	0	0	0	0	0	0	NI
Nov-11	0	0	0	0	0	0	NS	NS	0	0	0	0	0	0	NI
Feb-12	0	0	0	0	0	0	NS	NS	0	0	0	0	0	0	NI
May-12	0	0	0	0	0	0	NS	NS	0	0	0	0	0	0	NI
Nov-12	0	-- (b)	-- (a)	0	12	0	NS	NS	1	0	0	0	NS	NS	NI
Jun-13	0	-- (b)	-- (b)	0	0.8	0	NS	NS	0.7	0	0	0	0	NS	NI
Dec-13	0	-- (b)	-- (b)	NS	0	0	NS	NS	0.8	0	0	0	NS	NS	NI
Jun-14	0	-- (b)	-- (b)	0	0	0	NS	NS	0.8	0	0	0	NS	NS	0
Dec-14	0	-- (b)	-- (b)	0	0	0	NS	NS	1.3	0	0	0	0	0	NS
Jun-15	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Dec-15	0	-- (b)	-- (b)	0	0	0	NS	NS	0.5	0	0	0	0	0	NS
Jun-16	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Dec-16	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Jun-17	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Dec-17	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Jun-18	0	-- (b)	-- (b)	0	0	0	NS	0	0	0	0	0	0	0	NS
Dec-18	0	-- (b)	-- (b)	0	0	0	NS	NS	0	0	0	0	0	0	NS
Minimum	0	0	0	0	0	0	637	0	0	0	0	0	0	0	0
Maximum	1.7	0	0	0	12	0	1257	57	1.3	9	0	0	27	0	0
Mean	0.1	0	0	0	0.6	0	913	9	0.2	0.4	0	0	1	0	0

**Notes:**

BTEX - Benzene, toluene, ethylbenzene and isomers of xylene

µg/L - micrograms per liter

NS - Not sampled.

NI - Piezometer not installed at time of sampling.

(a) - To calculate total BTEX concentration, a value of zero is used for non-detect values.

(b) - Monitoring well was decommissioned on 6/4/12 as part of the Utility Corridor Construction activities. See "Construction Completion Report, Utility Corridor Work Plan Implementation" (Brown and Caldwell, December 2012).

**TABLE 4**  
**SUMMARY OF HISTORICAL PAH CONCENTRATIONS**  
**PATCHOGUE FORMER MGP SITE**  
**PATCHOGUE, NEW YORK**

Sampling Date	Total PAH Concentrations (µg/L) <sup>(a)</sup>														
	Monitoring Well/Piezometer														
	MW-1	MW-2S	MW-2D	MW-3	MW-4S	MW-4D	MW-5	MW-6	MW-7S	MW-7D	MW-8S	MW-8D	MW-9S	MW-9D	PZ-4A
Mar-08	0	0	0	0.76	0.6	4.3	1774	214	NS	NS	NS	NS	NS	NS	NI
Jul-08	NS	0.7	0	0	8	0	1799	154	0	0.47	0	0	12	0	NI
Mar-09	0	0	0	0	0	0	2730	0	0	0	0	0	0	0	NI
Sep-09	0	0	0	0	0	0	3373	1	0	0	0	0	0	0	NI
Mar-10	0	0	0	0	0	39	2390	17	0	0	22	0	2	0	NI
Sep-10	0	0	0	128	0	6	NS	14	0	0	11	0	396	0	NI
Jan-11	22	0	0	17	0	12	NS	NS	0	0	6	0	42	5	NI
Apr-11	0	0	0	6	0	20	NS	NS	0	0	0	0	9	0	NI
Aug-11	0	0	0.1	14	0.1	0	NS	NS	0	0	0.4	0	16	1.2	NI
Nov-11	0	0	0.2	10	0.4	0	NS	NS	0	0	0.8	0.2	8	3.4	NI
Feb-12	0.2	0	0	6	0.6	4	NS	NS	0.1	0	0.6	0	5	2.9	NI
May-12	0.4	0.1	0.6	5	0	5.8	NS	NS	0.1	0.3	1	0	6	2.8	NI
Nov-12	0.1	-- (b)	-- (b)	5.6	0.4	11.7	NS	NS	2.5	2.6	0.8	1.2	NS	NS	NI
Jun-13	0.8	-- (b)	-- (b)	NS	0.3	3.7	NS	NS	1.3	0.4	0.4	0.6	2	NS	NI
Dec-13	0	-- (b)	-- (b)	NS	0	2.5	NS	NS	0.8	0.4	0.3	0	NS	NS	NI
Jun-14	0	-- (b)	-- (b)	2.2	0.9	0	NS	NS	0.8	0.3	0.2	0	NS	NS	0.3
Dec-14	0.1	-- (b)	-- (b)	1.2	0.4	0	NS	NS	3	0	0.1	0	21	0.3	NS
Jun-15	0	-- (b)	-- (b)	1.1	0.9	0	NS	NS	0.9	0	0.3	0	10	0.3	NS
Dec-15	0	-- (b)	-- (b)	0	0	0	NS	NS	0.9	0	0	0	3.9	0	NS
Jun-16	0	-- (b)	-- (b)	1.9	0.8	0	NS	NS	2.5	0	0	0	5.9	0	NS
Dec-16	0	-- (b)	-- (b)	0.02	0	0.1	NS	NS	0	0	0	0	5.5	0.07	NS
Jun-17	0	-- (b)	-- (b)	2.0	0.5	0	NS	NS	1	0	0	0	3.2	0	NS
Dec-17	0	-- (b)	-- (b)	0.53	0	0.031	NS	NS	0	0.11	0	0.017	6.0	0.14	NS
Jun-18	0	-- (b)	-- (b)	3.1	1.1	0.010	NS	53	0.02	0.01	0.08	0.09	7.4	0.55	NS
Dec-18	0.31	-- (b)	-- (b)	1.5	1.2	0.080	NS	NS	0.08	0.05	0.10	0.13	7.9	1.0	NS
Min	0	0	0	0	0	0	1774	0	0	0	0	0	0	0	0.3
Max	22	0.7	0.6	128	8	39	3373	214	3	2.6	22	1.2	396	5	0.3
Mean	1.0	0.1	0.1	9	0.6	4	2413	65	0.6	0.2	1.8	0.1	27	0.9	0.3

**Notes:**

PAH - Polycyclic aromatic hydrocarbons

µg/L - micrograms per liter

NS - Not sampled.

NI - Piezometer not installed at time of sampling.



(a) - To calculate total PAH concentration, a value of zero is used for non-detect values.

(b) - Monitoring well was decommissioned on 6/4/12 as part of the Utility Corridor Construction activities. See "Construction Completion Report, Utility Corridor Work Plan Implementation" (Brown and Caldwell, December 2012).


## Figures

---



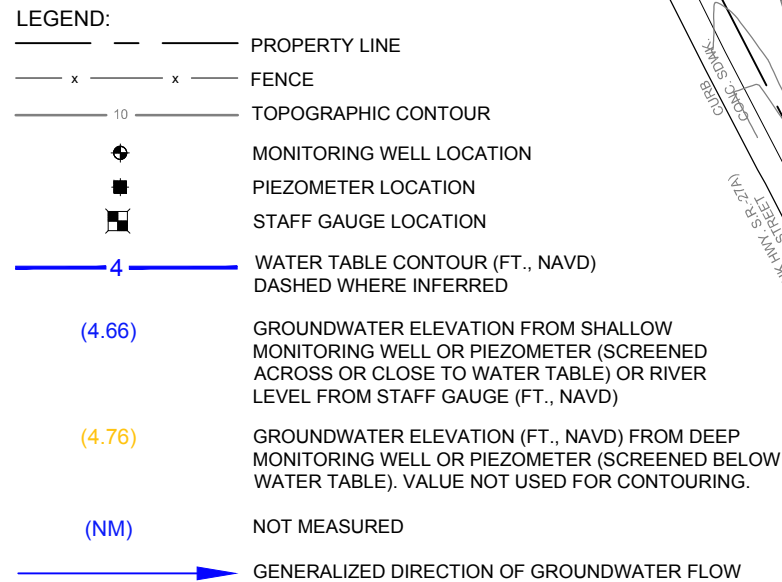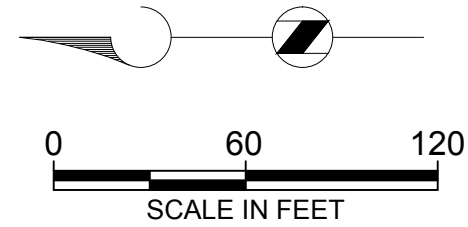

NOTES:  
1. BASE MAP INFORMATION OBTAINED FROM TETRA TECH EC, INC. DRAWING ENTITLED "CONCEPTUAL SITE MODEL", DATED DECEMBER 17, 2008.

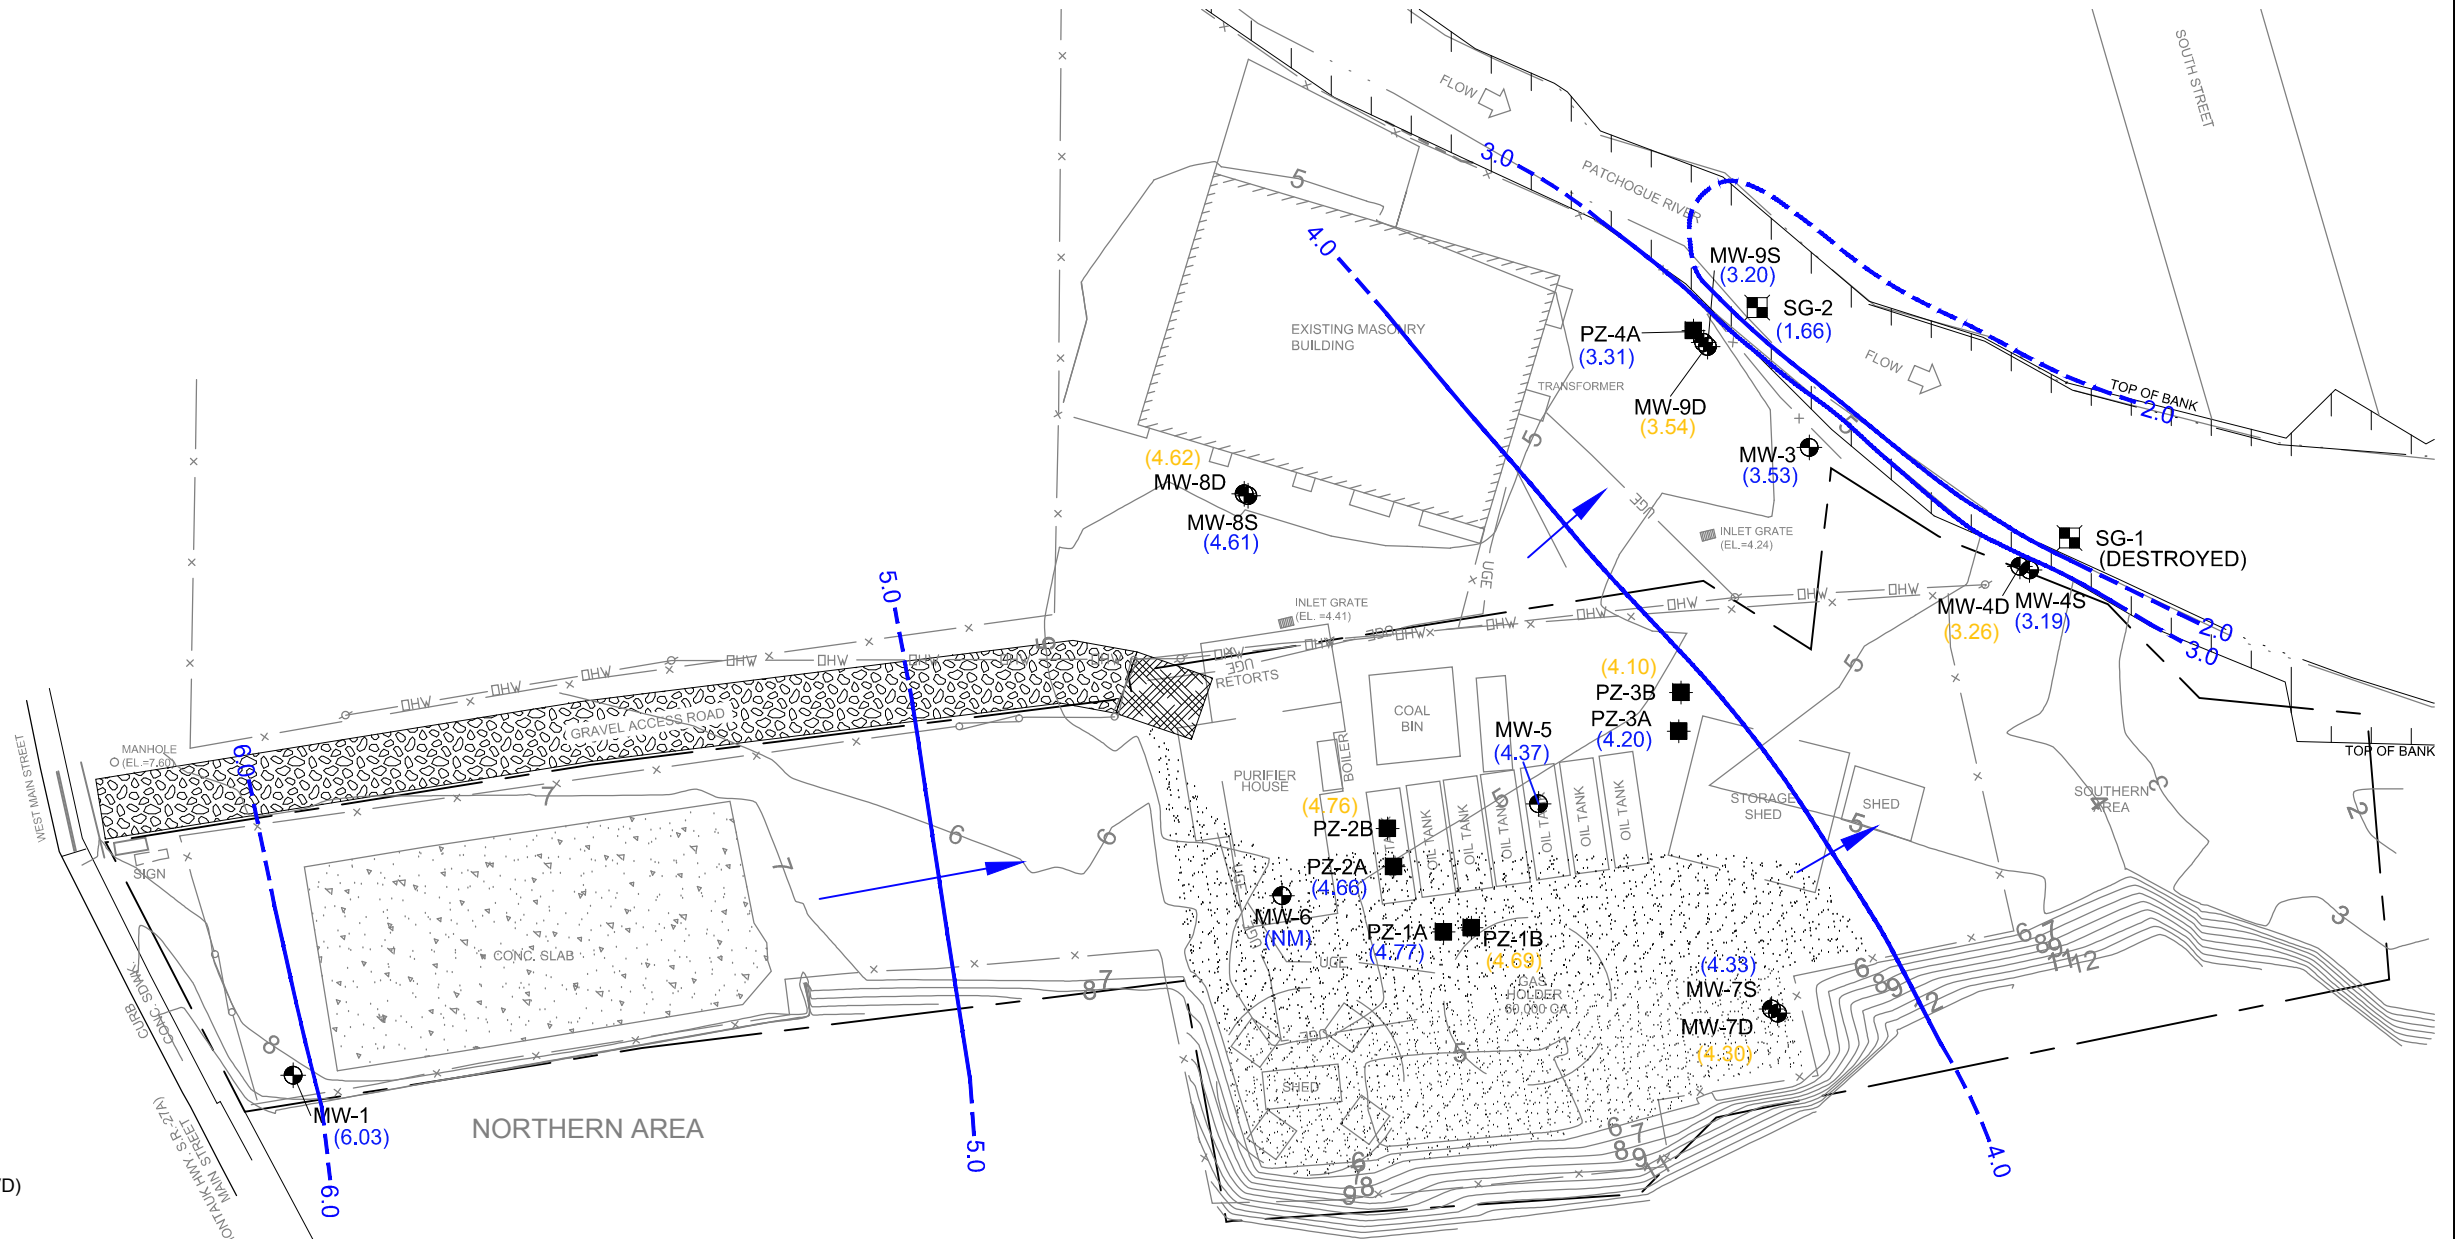

SCALE: 1" = 60'  
149322  
DATE: January 3, 2019

NATIONAL GRID  
PATCHOGUE FORMER MGP SITE  
VILLAGE OF PATCHOGUE, NEW YORK

WATER TABLE ELEVATION CONTOUR MAP  
DECEMBER 11, 2018

FIGURE  
1

## Appendix A: Field Sampling Data Sheets

---



**LOW-FLOW GROUNDWATER  
SAMPLING FIELD DATA**Well Number: MW-1  
Sample I.D.: MW-1-20181211 (different from well no.)Project: Patchogue former MGP site  
Personnel: REN / SPWDate: 12/11/18 Time: 1332  
Weather: Sunny Air Temp.: 38**WELL DATA:**

Casing Diameter: 4 ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2 ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 5.43 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☒ Yes ☐ No ☐ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No  
VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

**PURGE DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☐ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 200 mL/min Elapsed Time: 30 min Volume Pumped: 2 G  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☒ Prepared Off-Site ☐ Field Cleaned

**SAMPLING DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☐ Polyethylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☒ Dedicated ☐ Prepared Off-Site ☐ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☒ Color: yellow ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Barclay Henrich Date: 12/11/18

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: Patchogue former MGP site	Project Number: 149322
Client: National Grid	Date: 12/11/18
Personnel: REM/SPW	Well ID: MW-1
Purge/Sample Depth: 213.5	Sample ID: MW-1-20181211

[illegible]**Certified Sample Information:**

Time of Sample: 1405

Analyst Signature: [Signature]

**Instrument Data:**

Manufacturer/Model: Horiba U-52

Serial No. Unit: 54DE TORP

Serial No. Handheld: UOR1537VF

Calibration Date/Time: 12/6/18

**Are low-flow parameters subject to field lab certification?** ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MU-75  
Sample I.D.: MU-75-20181211 (If different from well no.)

Project: Patchogue former MGP site  
Personnel: BEH / SPW

Date: 12/11/18 Time: 1421  
Weather: Sunny Air Temp.: 38

### WELL DATA:

Casing Diameter: 4 ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2 ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 4.14 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☐ Yes ☒ No  
Does Weep Hole adequately drain well head? ☐ Yes ☒ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☐ Yes ☒ No  
Is Padlock Functional? ☒ Yes ☐ No ☐ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☐ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 250 ml/min Elapsed Time: 30 min Volume Pumped: 2.5 g  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☒ Prepared Off-Site ☐ Field Cleaned

### SAMPLING DATA:


METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☐ Polyethylene  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☐ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☒ Color: yellow ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Radul H. Natchi Date: 12/11/18





Sample ID: NY-75-20181211

**Revision 2.1: 10/20/14**

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-7D  
Sample I.D.: MW-7D-20181211 (if different from well no.)

Project: Patchogue former MGP site  
Personnel: REH/SPW

Date: 12/11/18 Time: 1502  
Weather: Sunny Air Temp.: 38

### WELL DATA:

Casing Diameter: 4" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO: Static Water Level: 4.00 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☒ Yes ☐ No ☐ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 200 mL/min Elapsed Time: 30 min Volume Pumped: 2 G  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.  
DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☐ No ☒ Yes Name: MW-7D-20181211-MS/MSD

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: [Signature] Date: \_\_\_\_\_

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: Patchogue former MGP site	Project Number: 149322
Client: National Grid	Date: 12/11/18
Personnel: RETH SPW	Well ID: MW-7D
Purge/Sample Depth: ~25.5	Sample ID: MW-7D-20181211

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
1502	7.01	10.88	0.457	4.06	39.4	-28	3.97		
1505	6.13	11.87	0.494	1.82	42.5	84	3.97		
1508	6.22	12.15	0.490	2.35	36.7	74	3.97		
1511	6.26	12.43	0.477	2.25	28.2	112	3.97		
1514	6.25	12.52	0.470	2.12	22.9	119	3.97		
1517	6.29	12.61	0.457	1.95	15.0	130	3.97		
1520	6.31	12.70	0.450	1.88	14.0	133	3.97		
1523	6.32	12.87	0.445	1.81	13.3	137	3.97		
1526	6.32	12.90	0.443	1.70	12.8	139	3.97		
1529	6.31	12.99	0.441	1.62	11.6	142	3.97		
1532	6.30	13.09	0.438	1.53	10.6	146	3.97		
1535	collected sample MW-70-2018					2.11	145	MSD	

**Certified Sample Information:**

Time of Sample: 1535

**Analyst Signature:**

**Instrument Data:**

**Manufacturer/Model:** Horiba U-52

Serial No. Unit: 5 A P E T O K P

Serial No. Handheld: YORK 5 7UF

Calibration Date/Time: 12/6/18

Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-85  
Sample I.D.: MW-85-20181211 (if different from well no.)

Project: Patchogue former MGP site  
Personnel: REM/SPW

Date: 12/11/18 Time: 1600  
Weather: Sunny Air Temp.: 38

### WELL DATA:

Casing Diameter: 8" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 0.44 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☒ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☒ Yes ☐ No ☐ NA Is Inner Casing Intact? ☐ Yes ☒ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No  
VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: \_\_\_\_\_ Elapsed Time: \_\_\_\_\_ Volume Pumped: \_\_\_\_\_  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☒ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☐ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: [Signature] Date: 12/11/18

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: Patchogue former MGP site	Project Number: 149322
Client: National Grid	Date: 12/1/18
Personnel: REM / SPW	Well ID: MW-8S
Purge/Sample Depth: ~8	Sample ID: MW-8S-20181211

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
1600	6.57	11.70	0.511	3.37	411	-8	0.53	200 ↓	
1603	6.62	12.93	0.583	1.23	341	-42	0.50		
1608	6.66	13.44	0.616	0.73	198	-51	0.50		
1609	6.65	13.55	0.624	0.53	119	-51	0.48		
1612	6.64	13.75	0.630	0.44	84.8	-52	0.48		
1615	6.65	13.88	0.634	0.31	47.4	-53	0.48		
1618	6.63	13.91	0.635	0.24	39.4	-52	0.48		
1621	6.66	14.00	0.638	0.19	34.3	-54	0.48		
1624	6.66	14.03	0.639	0.16	29.8	-55	0.48		
1627	6.64	14.05	0.639	0.15	26.1	-55	0.48		
1630	6.66	14.10	0.640	0.13	26.4	-56	0.48		
1633	Collect sample MW-85					-20181211			

**Certified Sample Information:**

Time of Sample: 1633

**Analyst Signature:**

**Instrument Data:**

Manufacturer/Model: Horiba U-52

Serial No. Unit: 5 A D E - 70 R P

Serial No. Handheld: UORK 3VF

Calibration Date/Time: 12/6/18

Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-80  
Sample I.D.: MW-80-201812/2 (if different from well no.)

Project: Patchogue former MGP site  
Personnel: REH/SPW

Date: 12/12/18 Time: 0746  
Weather: Sunny Air Temp.: 33

### WELL DATA:

Casing Diameter: 8" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 0.41 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☐ Yes ☐ No ☒ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel Tubing/Rope: ☐ Teflon®  
☐ PVC ☐ Polyethylene  
☐ Other: \_\_\_\_\_ ☐ Polypropylene  
Other: \_\_\_\_\_  
Pumping Rate: 300 ml/min Elapsed Time: 30 min Volume Pumped: 3 G  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel Tubing/Rope: ☐ Teflon®  
☐ Polyethylene  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_



I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: [Signature] Date: 12/12/18

**2 Park Way, Upper Saddle River, NJ 07458**  
**Phone: (201) 574-4700 Fax: (201) 236-1607**

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: Patchogue former MGP site	Project Number: 149322
Client: National Grid	Date: 12/12/18
Personnel: REH/SPW	Well ID: MW-80
Purge/Sample Depth: ~23	Sample ID: MW-80-20181212

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
0746	7.06	14.37	0.348	7.10	32.8	132	0.41		
0749	6.42	14.66	0.392	2.38	19.6	162	0.41		
0752	6.33	14.71	0.393	2.04	14.3	171	0.41		
0755	6.35	14.83	0.394	1.87	9.0	179	0.41		
0758	6.29	14.82	0.392	1.74	9.1	183	0.41		
0801	6.34	14.76	0.389	1.77	8.8	182	0.41		
0804	6.30	14.75	0.388	1.68	6.9	186	0.41		
0807	6.31	14.80	0.389	1.57	7.0	186	0.41		
0810	6.31	14.85	0.390	1.46	7.3	188	0.41		
0813	6.24	14.89	0.388	1.31	7.4	197	0.41		
0816	6.26	14.87	0.387	1.24	7.5	193	0.41		
0819	Collect sample				11/18/2018	1212			
									

**Certified Sample Information:**

**Time of Sample:**

**Analyst Signature:**

**Instrument Data:**

**Manufacturer/Model:** Horiba U-52

Serial No. Unit: 5A DETORP

**Serial No. Handheld:**

Calibration Date/Time: 12/6/18

Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-45  
Sample I.D.: MW-45-20181212 (if different from well no.)

Project: Patchogue former MGP site  
Personnel: REH/SPW

Date: 12/12/18 Time: 0834  
Weather: Sunny Air Temp.: 33

### WELL DATA:

Casing Diameter: 4" ☐ Stainless Steel ☐ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☐ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 4.84 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☐ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☐ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☐ Yes ☐ No  
Does Weep Hole adequately drain well head? ☐ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☐ Yes ☐ No  
Is Padlock Functional? ☒ Yes ☐ No ~~Is Inner Casing Intact?~~ ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 200ml/min Elapsed Time: 30min Volume Pumped: 24  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☒ Color: yellow ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Michael Hognacki Date: 12/12/18



**2 Park Way, Upper Saddle River, NJ 07458**  
**Phone: (201) 574-4700 Fax: (201) 236-1607**

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: <u>Patchogue former MGP site</u>	Project Number: <u>149322</u>
Client: <u>National Grid</u>	Date: <u>12/12/18</u>
Personnel: <u>KEH / SPW</u>	Well ID: <u>NU-45</u>
Purge/Sample Depth: <u>~10.5</u>	Sample ID: <u>NU-45-20181212</u>

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
0834	6.80	11.65	0.531	3.91	524	-77	4.98	200 ↓	
0837	7.05	12.08	0.546	3.00	235	-119	4.95		
0840	7.14	12.33	0.549	2.45	217	-127	4.98		
0843	7.13	12.51	0.550	2.18	170	-129	5.02		
0846	7.17	12.61	0.557	1.81	111	-134	5.02		
0849	7.16	12.75	0.554	1.40	59.4	-134	4.98		
0852	7.17	12.82	0.556	1.27	54.1	-136	4.98		
0855	7.16	12.92	0.557	1.06	78.3	-136	5.02		
0858	7.18	12.97	0.557	0.95	38.6	-136	4.98		
0901	7.19	13.02	0.557	0.79	44.9	-136	4.98		
0904	7.18	13.05	0.557	0.71	32.5	-137	4.98		
0907	Collect sample				45-2018	1212			

**Certified Sample Information:**

Time of Sample: 0907

**Analyst Signature:**

**Instrument Data:**

Manufacturer/Model: Horiba U-52

Serial No. Unit: 5ADETORP

Serial No. Handheld: UOR K3 71 F

Calibration Date/Time: 12/6/18

Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

**LOW-FLOW GROUNDWATER  
SAMPLING FIELD DATA**Well Number: MW-4D  
Sample I.D.: MW-4D-20181212 (( different from well no. ))Project: Patchogue former MGP site  
Personnel: REH/SPWDate: 12/12/18 Time: 0913  
Weather: Sunny Air Temp.: 34**WELL DATA:**

Casing Diameter: 4" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 4 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☒ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☒ Yes ☐ No ☐ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

**PURGE DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 250 ml/min Elapsed Time: 20 min Volume Pumped: 2.56  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

**SAMPLING DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Rachul H. Guackin Date: 12/12/18

**Brown AND Caldwell**

2 Park Way, Upper Saddle River, NJ 07458  
Phone: (201) 574-4700 Fax: (201) 236-1607

**NJ FIELD LAB ID# 02023  
LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: <u>Patchogue former MGP site</u>	Project Number: <u>149322</u>
Client: <u>National Grid</u>	Date: <u>12/12/18</u>
Personnel: <u>REM / SPW</u>	Well ID: <u>NW-40</u>
Purge/Sample Depth: <u>~2'</u>	Sample ID: <u>NW-40-20181212</u>

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
0913	6.35	13.03	0.667	3.00	13.6	77	4.60	250 ↓ ✓	
0916	5.97	13.44	0.677	0.82	11.6	148	4.58		
0919	5.95	13.44	0.682	0.41	11.2	163	4.58		
0922	5.96	13.50	0.689	0.32	10.1	174	4.58		
0925	5.93	13.58	0.687	0.07	6.7	190	4.58		
0928	5.92	13.58	0.693	0.02	4.6	201	4.58		
0931	5.93	13.53	0.695	0.00	3.2	207	4.58		
0934	5.93	13.55	0.696	0.00	2.9	210	4.58		
0937	5.91	13.48	0.698	0.00	2.0	214	4.58		
0940	5.93	13.60	0.699	0.00	1.9	218	4.58		
0943	5.92	13.57	0.701	0.00	1.2	222	4.58		
0946	Collect 2 depth NW-40 - 20181212								

**Certified Sample Information:**Time of Sample: 0946Analyst Signature: Rachel Hignack**Instrument Data:**Manufacturer/Model: Horiba U-52Serial No. Unit: SADETORYSerial No. Handheld: VORKS TV FCalibration Date/Time: 12/6/18Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-3  
Sample I.D.: MW-3-20181212 (if different from well no.)

Project: Patchogue former MGP site  
Personnel: REH/SPW

Date: 12/12/18 Time: 1001  
Weather: SUNNY Air Temp.: 34

### WELL DATA:

Casing Diameter: 8" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 2.08 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☒ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☐ Yes ☐ No ☒ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_

MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_

Pumping Rate: 2.50 gpm Elapsed Time: 30 min Volume Pumped: 2.56  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_

PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_

MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_

SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_

APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid

FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☐ No ☒ Yes Name: DUP-20181212  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Rachel H. Snack Date: 12/12/18

**Brown AND Caldwell**

2 Park Way, Upper Saddle River, NJ 07458  
Phone: (201) 574-4700 Fax: (201) 236-1607

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: <u>Patchogue former MGP site</u>		Project Number: <u>149322</u>
Client: <u>National Grid</u>		Date: <u>12/12/18</u>
Personnel: <u>REH/SPW</u>		Well ID: <u>MW-3</u>
Purge/Sample Depth: <u>~8</u>		Sample ID: <u>MW-3-20181212</u>

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
1001	6.81	11.91	0.805	0.25	4.6	133	2.09	250 ↓ ✓	
1004	6.88	12.34	0.803	0.00	1.6	126	2.10		
1007	6.88	12.06	0.803	0.00	1.0	125	2.12		
1010	6.90	12.70	0.808	0.00	1.8	124	2.12		
1013	6.88	12.81	0.810	0.00	0.8	123	2.12		
1016	6.90	12.88	0.810	0.00	1.3	122	2.12		
1019	6.90	12.95	0.811	0.00	1.1	121	2.12		
1022	6.88	13.01	0.813	0.00	0.4	120	2.12		
1025	6.90	12.96	0.812	0.00	0.6	118	2.12		
1028	6.89	12.91	0.811	0.00	0.7	116	2.12		
1031	6.90	12.93	0.812	0.00	0.4	116	2.12		
1034	Collect MW-3-20181212					and	PUP-20181212		

**Certified Sample Information:**Time of Sample: 1034Analyst Signature: [Signature]**Instrument Data:**Manufacturer/Model: Horiba U-52Serial No. Unit: SADETORPSerial No. Handheld: UORK 370 FCalibration Date/Time: 12/6/18Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.

## LOW-FLOW GROUNDWATER SAMPLING FIELD DATA

Well Number: MW-9D  
Sample I.D.: MW-9D-2018K12 (different from well no.)

Project: Patchogue former MGP site

Personnel: REH/SPW

Date: 12/12/18 Time: 1052  
Weather: Sunny Air Temp.: 34

### WELL DATA:

Casing Diameter: 8" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO: Static Water Level: 1.13 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☐ Yes ☐ No ☒ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No

VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

### PURGE DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 225 ml/min Elapsed Time: 30 min Volume Pumped: 2,250  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

### SAMPLING DATA:

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: [Signature] Date: 12/12/18

**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: <u>Patchogue former MGP site</u>	Project Number: <u>149322</u>
Client: <u>National Grid</u>	Date: <u>12/12/18</u>
Personnel: <u>REM/SPW</u>	Well ID: <u>MW-9D</u>
Purge/Sample Depth: <u>~20.5</u>	Sample ID: <u>MW-9D-2018/12/12</u>

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
1052	5.98	12.46	0.397	4.92	28.1	180	1.17	2-25 ↓ ✓	
1055	5.27	13.15	0.453	1.53	29.2	243	1.17		
1058	5.19	13.47	0.461	0.75	45.2	272	1.17		
1101	5.23	13.65	0.450	0.59	73.4	280	1.17		
1104	5.31	13.70	0.449	0.48	63.9	287	1.17		
1107	5.34	13.76	0.449	0.41	54.5	289	1.17		
1110	5.30	13.77	0.451	0.32	42.3	290	1.17		
1113	5.32	13.73	0.454	0.25	38.6	290	1.17		
1116	5.30	13.78	0.455	0.20	34.7	291	1.17		
1119	5.31	13.86	0.457	0.15	31.0	291	1.17		
1122	5.28	13.78	0.459	0.09	27.1	293	1.17		
1125	Collect Sample			MW-	90-20	1212			

**Certified Sample Information:**

Time of Sample: 1125

**Analyst Signature:**

**Instrument Data:**

Manufacturer/Model: Horiba U-52

Serial No. Unit: 51 DET 001

Serial No. Handheld: UORK97UF

Calibration Date/Time: 12/6/18

Are low-flow parameters subject to field lab certification? ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

**LOW-FLOW GROUNDWATER  
SAMPLING FIELD DATA**Well Number: MW-95  
Sample I.D.: MW-95-20181212 (if different from well no.)Project: Patchogue former MGP site  
Personnel: REH/SPWDate: 12/12/18 Time: 1131  
Weather: Sunny Air Temp.: 34**WELL DATA:**

Casing Diameter: 8" ☐ Stainless Steel ☒ Steel ☐ PVC ☐ Teflon® ☐ Other: \_\_\_\_\_  
Intake Diameter: 2" ☐ Stainless Steel ☐ Galv. Steel ☒ PVC ☐ Teflon® ☐ Open rock  
DEPTH TO : Static Water Level: 1.29 ft Bottom of Well: \_\_\_\_\_ ft  
DATUM: ☐ Top of Protective Casing ☒ Top of Well Casing ☐ Other: \_\_\_\_\_  
CONDITION: Is Well clearly labeled? ☐ Yes ☒ No Is well clean to bottom? ☐ Yes ☐ No  
Is Prot. Casing/Surface Mount in Good Cond.? (not bent or corroded) ☒ Yes ☐ No  
Does Weep Hole adequately drain well head? ☒ Yes ☐ No  
Is Concrete Pad Intact? (not cracked or frost heaved) ☒ Yes ☐ No  
Is Padlock Functional? ☐ Yes ☐ No ☒ NA Is Inner Casing Intact? ☐ Yes ☐ No  
Is Inner Casing Properly Capped and Vented? ☒ Yes ☐ No  
VOLUME OF WATER: Standing in well: \_\_\_\_\_ To be purged: \_\_\_\_\_

**PURGE DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Centrifugal Pump ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
Pumping Rate: 200ml/min Elapsed Time: 30min Volume Pumped: 26  
Was well Evacuated? ☐ Yes ☒ No Number of Well Volumes Removed: \_\_\_\_\_  
PURGING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned

**SAMPLING DATA:**

METHOD: ☐ Bailer, Size: \_\_\_\_\_ ☒ Bladder Pump ☐ 2" Submersible Pump ☐ 4" Submersible Pump  
☐ Syringe Sampler ☐ Peristaltic Pump ☐ Inertial Lift Pump ☐ Other: \_\_\_\_\_  
MATERIALS: Pump/Bailer: ☐ Teflon® ☒ Stainless Steel ☐ PVC ☐ Other: \_\_\_\_\_  
Tubing/Rope: ☐ Teflon® ☒ Polyethylene ☐ Polypropylene ☐ Other: \_\_\_\_\_  
SAMPLING EQUIPMENT: ☐ Dedicated ☐ Prepared Off-Site ☒ Field Cleaned  
Metals samples field filtered? ☐ Yes ☒ No Method: \_\_\_\_\_  
APPEARANCE: ☒ Clear ☐ Turbid ☐ Color: \_\_\_\_\_ ☐ Contains Immiscible Liquid  
FIELD DETERMINATIONS: See attached form for field parameter data.

DUP: ☒ No ☐ Yes Name: \_\_\_\_\_  
MS/MSD: ☒ No ☐ Yes Name: \_\_\_\_\_

I certify that this sample was collected and handled in accordance with applicable regulatory and project protocols.

Signature: Rachul K. Guack Date: 12/12/18



**NJ FIELD LAB ID# 02023**  
**LOW-FLOW GROUNDWATER FIELD DATA SHEET**

Project Name: Patchogue former MGP site	Project Number: 149322
Client: National Grid	Date: 12/12/18
Personnel: REM/SPW	Well ID: MW-95
Purge/Sample Depth: ~ 8	Sample ID: MW-95-20181212

Actual Time	Certified Parameters					ORP (mV)	DTW (ft)	Pumping Rate (mL/min)	Comments
	pH	Temp (°C)	Cond (mS/cm)	DO (mg/L)	Turbidity (NTU)				
11:31	6.50	11.98	0.544	11.05	22.9	-53	1.33	<div>200</div> <div>↓</div> <div>✓</div>	
11:34	6.80	12.24	0.547	10.17	14.0	-124	1.33		
11:37	6.97	12.90	0.538	8.79	89.6	-128	1.33		
11:40	7.01	12.97	0.538	7.79	64.7	-120	1.33		
11:43	7.02	13.04	0.538	7.44	57.7	-120	1.34		
11:46	7.03	13.10	0.539	6.74	50.8	-122	1.34		
11:49	7.05	13.15	0.539	6.25	45.9	-125	1.33		
11:52	7.06	13.24	0.539	5.68	39.3	-126	1.33		
11:55	7.06	13.30	0.539	5.28	37.8	-125	1.33		
11:58	7.05	13.22	0.538	4.85	34.5	-126	1.33		
12:01	7.05	13.22	0.539	4.58	34.9	-128	1.33		
12:04	Collect MW-95					-2018	1212		
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									
<div></div>									

**Certified Sample Information:**

Time of Sample: 1204

Analyst Signature: *Scott G. Wach*

**Instrument Data:**

Manufacturer/Model: Horiba U-52

Serial No. Unit: 5 ADET ORP

Serial No. Handheld: VORIS 37VF

Calibration Date/Time: 12/6/18

**Are low-flow parameters subject to field lab certification?** ☐ Yes ☒ No (not required for CERCLA sites or sites outside of NJ)

**If yes, low-flow data must be accompanied by a completed "Field Calibration Record, Horiba U-52" form or equivalent.**

## **Appendix B: Laboratory Reports (CD-ROM)**

---



## Appendix C: Data Usability Summary Report

---





---

# **USEPA Data Validation *Organic* Data Validation Report**

**Patchogue, NY**

***Lab SDG No. BCH22***  
**MCGI Project No. BC051901-BCH22**

***Prepared for:***  
**Brown & Caldwell**  
**2 Park Way, Suite 2A**  
**Upper Saddle River, NJ 07458**

***Prepared by:***  
**“MCGI”**  
**Meridian Consultant Group, Inc.**  
***Environmental Services & Data Validation***

1997 Annapolis Exchange Pkwy, Suite 300  
Annapolis, MD 21401  
Phone:(301)803-9207 Fax:(410)972-4701  
[www.meridiancgi.com](http://www.meridiancgi.com)

*March, 2019*

---

## **CONTENTS**

- GLOSSARY OF ACRONYMS & TERMS
- COMMUNICATION RECORDS
- GLOSSARY OF DATA VALIDATION QUALIFIERS
- REASON CODES
- DATA VALIDATION REPORT NARRATIVE
- ELECTRONIC DATA DELIVERABLE (EDD) with applicable qualifiers, Refer to the EDD Excel file.
- SUPPORT DOCUMENTATION, Refer to the electronic Data Package PDF file.

## **GLOSSARY OF ACRONYMS & TERMS**

## **GLOSSARY OF ACRONYMS & TERMS**

One or more of the following acronyms and terms may have been used in the descriptive process of the **Organic** Data Validation.

### **Acronyms:**

<b>BFB</b>	Bromofluorobenzene (volatile instrument performance check)
<b>BNA</b>	Base/Neutral/Acid
<b>CCCs</b>	Calibration Check Compounds
<b>CF</b>	Calibration Factor
<b>CLP</b>	Contract Laboratory Program
<b>COC</b>	Chain of Custody
<b>CRDL</b>	Contract Required Detection Limit
<b>CRQL</b>	Contract Required Quantitation Limit
<b>CSF</b>	Complete SDG File
<b>%D</b>	Percent Difference
<b>DCB</b>	Decachlorobiphenyl (Pesticide/PCB/ surrogate compound)
<b>DFTPP</b>	Decafluorotriphenylphosphine (semivolatile instrument performance check)
<b>DSF</b>	Data Summary Form
<b>ECD</b>	Electron-Capture Detector
<b>EICP</b>	Extended Ion Current Profile
<b>EPA</b>	United States Environmental Protection Agency
<b>GC</b>	Gas Chromatography
<b>GC/EC</b>	Gas Chromatography/Electron Capture
<b>GC/MS</b>	Gas Chromatography/Mass Spectra
<b>GPC</b>	Gel Permeation Chromatography (Clean Up)
<b>ICAL</b>	Initial Calibration
<b>IS</b>	Internal Standard
<b>LCS</b>	Laboratory Control Sample
<b>LCL</b>	Lower Control Limit
<b>MCL</b>	Maximum Contamination Level
<b>MDL</b>	Method Detection Limit
<b>MS/MSD</b>	Matrix Spike/Matrix Spike Duplicate
<b>m/z</b>	The ratio of mass (m) to charge (z) of ions measured by GC/MS
<b>OADS</b>	Organic Analysis Data Sheet (Form 1)
<b>ORDA</b>	Organic Regional Data Assessment
<b>PCB</b>	Poly Chlorinated Biphenyl
<b>PEM</b>	Performance Evaluation Mixture

<b><i>QA/QC</i></b>	Quality Assurance/Quality Control
<b><i>QAPjP</i></b>	Quality Assurance Project Plan
<b><i>QC</i></b>	Quality Control
<b><i>%R</i></b>	Percent Recovery of spiked amount
<b><i>RF</i></b>	Response Factor
<b><i>RIC</i></b>	Reconstructed Ion Chromatogram
<b><i>RPD</i></b>	Relative Percent Difference
<b><i>RRF</i></b>	Relative Response Factor
<b><i>RSD</i></b>	Relative Standard Deviation
<b><i>RT</i></b>	Retention Time
<b><i>RTW</i></b>	Retention Time Window
<b><i>SDG</i></b>	Sample Delivery Group
<b><i>SMC</i></b>	System Monitoring Compound
<b><i>SOP</i></b>	Standard Operation Procedures
<b><i>SOW</i></b>	Statement of Work
<b><i>SPCCs</i></b>	System Performance Check Compounds
<b><i>SSL</i></b>	Samples Shipping Log
<b><i>SVOA</i></b>	Semivolatile Organic Analyte
<b><i>TCL</i></b>	Target Compound List
<b><i>TCX</i></b>	Tetrachloro-m-Xylene (Pesticide/PCB surrogate compound)
<b><i>TIC</i></b>	Tentatively Identified Compound
<b><i>TPH</i></b>	Total Petroleum Hydrocarbons
<b><i>UCL</i></b>	Upper Control Limit
<b><i>VOA</i></b>	Volatile Organic Analyte
<b><i>VTSR</i></b>	Validated Time of Sample Receipt

## **Terms:**

### ***Associated Samples***

Any sample related to a particular QC analysis.

### ***Case***

A finite, usually predetermined number of samples collected over a given time period for a particular site. A Case consists of one or more Sample Delivery Group(s).

### ***Contractual Holding Time***

The time from VTSR (validated time of sample receipt) to laboratory extraction and /or analysis.



***Data Validation Qualifier (DVQ)***

This refers to the column on the data summary form in which EPA Region III and other qualifiers have been placed by the data validator.

***Data Validation Result (DVR)***

This refers to the column on the data summary form used to report results that have been modified by the data validator. A result in the DVR column that is qualified “U” indicates a modification of the reporting limit.

***Field Blank*** Field blanks are intended to identify contaminants that may have been introduced in the field. Examples are rinsate blank (RB), field blanks (FB) and trip blank (TB).

***Field Duplicate***

A duplicate sample generated in the field; not in the laboratory.

***Initial Calibration (ICAL)***

The establishment of a calibration curve with the appropriate number of standards and concentration ranges. The calibration curve plots absorbances and/or emissions versus concentration of the standards. .

***Matrix Spike/Matrix Spike Duplicate (MS/MSD)***

Introduction of a known concentration of a compound into a sample to provide information about the effect of sample matrix on the extraction and/or measurement methodology.

***Performance Evaluation Mixture***

A standard used to verify that the ICAL sequence is stable throughout the GC or GC/MS analyses.

***Sample Delivery Group (SDG)***

Defined by one of the following, whichever occurs first:

- case of sample
- each twenty field samples in a case or
- each 14-day calendar period during which field samples in a case are received, beginning with the receipt of the first sample in the SDG.

***Technical Holding Time***

The time from sample collection to laboratory extraction and /or analysis

**COMMUNICATION RECORDS**

***N/A***

## **GLOSSARY OF DATA VALIDATION QUALIFIERS**

## **GLOSSARY OF DATA QUALIFIER CODES**

### **CODES RELATED TO IDENTIFICATION:**

(Confidence concerning presence or absence of compounds)

U	=	Not detected above the level of the associated value. The associated value is either the approximate sample quantitation or detection limit.
NO CODE	=	Confirmed identification
U1	=	Not detected substantially above the level reported in laboratory or field blanks.
R	=	Unusable results. Analyte may or may not be present in the sample.
N	=	Tentative identification. Consider present. Special methods may be needed to confirm its presence or absence in future sampling efforts.

### **CODES RELATED TO QUANTITATION:**

(Can be used for both positive results and sample quantitation limits)

J	=	Analyte present. Reported value may not be accurate or precise (estimated value).
J+	=	Analyte present. Reported value may be biased high. Result is estimated high.
J-	=	Analyte present. Reported value may be biased low. Result is estimated low.
UJ	=	Not detected. Quantitation limit may be inaccurate or imprecise (Estimated).
UJ-	=	Not detected. Quantitation limit is probably higher.

### **OTHER CODES:**

NJ	=	Qualitative identification questionable. Presumptively present at approximate quantity.
Q	=	No analytical result.
X	=	Data not Validated.

## **DATA VALIDATION REPORT NARRATIVE**



**MCGI**

**Meridian Consultant Group, Inc.**

*Environmental Services & Data Validation*

1997 Annapolis Exchange Pkwy., Suite 300  
Annapolis, MD 21401

(301)803-9207 Phone

(410)972-4701 Fax

[www.meridiancgi.com](http://www.meridiancgi.com)

**DATE:** March 11, 2019

**SUBJECT:** USEPA Organic Data Validation Report  
BTEX/MTBE & PAH  
Site: Patchogue, NY  
MCGI Project No. BC051901-BCH22

**FROM:** Sherif N. Mina  
Meridian Consultant Group, Inc.

**TO:** Mr. James L. Marolda  
Brown and Caldwell

**OVERVIEW**

This report consists of one (1) Sample Delivery Group (SDG) for a total of thirteen (13) aqueous samples submitted to eurofins Laboratories, Lancaster, PA, for BTEX/MTBE & Poly Aromatic Hydrocarbons (PAH) analyses according to SW-846 Methods 8260C & 8270D-SIM, respectively. Details about this SDG are listed in separate section below. The samples were analyzed in accordance with the Chain-of-Custody (COC).

The analytical results were validated according to the pertinent parts of U.S. Environmental Protection Agency (USEPA) National Functional Guidelines for Organic Data Review, dated January 2017; Guidance for Labeling Externally Validated Laboratory Analytical Data for Superfund Use, dated January 2009; along with the Quality Assurance/Quality Control (QA/QC) requirements for the analytical methods used for the analyses.

***Deviation from USEPA NFG:*** The “U” qualifier recommended by USEPA NFG for blank contamination was replaced by the “U1” qualifier to clearly indicate blank contamination on the EDDs.

## **GENERAL NOTES**

- ***Electronic Data Deliverable (EDD):*** Several rows in the electronic data deliverable (EDD) are marked with an “X” and hidden from the EDDs by the validator. These rows may include quality control samples such as Method Blanks, Laboratory Control Samples, Matrix Spikes, or Matrix Spike Duplicates which are not validated. Additionally, some field sample results may not be used since only one (1) result for each compound is reported after validation. The following list indicates some instances in which an “X” may be placed in the DVQ column:
  1. The compounds in an analysis that have exceeded the instrument calibration range.
  2. All compounds in a diluted analysis that were within the calibration range in the initial analysis.
  3. All compounds in either the initial analysis or re-analysis of a sample, depending on which analysis is not reported on the EDD.Although QC samples and some field samples results may not be used, all data were reviewed and considered in the overall assessment.
- ***Data Validation Qualifier (DVQ):*** This refers to the column on the data summary form in which EPA and other qualifiers have been placed by the data validator.
- ***Data Validation Result (DVR):*** This refers to the column on the data summary form used to report results that have been modified by the data validator. A result in the DVR column that is qualified “U” indicates a modification of the reporting limit. Results in the DVR column supersede those reported by the laboratory.
- ***Tentatively Identified Compounds (TICs):*** The TICs, if applicable, were reviewed during data validation.
- ***Compound Quantitation:*** Positive results for compounds which are below the CRQL were qualified as estimated “J” on the EDD.



**1-SDG: BCH22**

This SDG consisted of fourteen (14) aqueous samples submitted to eurofins Laboratories, Lancaster, PA, for BTEX/MTBE & PAH analyses according to SW-846 Methods 8260C & 8270D-SIM, respectively. One (1) trip & one (1) field blanks; and one (1) aqueous field duplicate pair were identified in this SDG. The samples were analyzed in accordance with the Chain-of-Custody (COC), see Sample Identification Summary.

**Sample Identification Summary**

SAMPLE INFORMATION				Analysis	
Field ID	Lab ID	SDG	Matrix	B	P
MW-1	9939614	BCH22	Aqueous	x	x
MW-7S	9939615		Aqueous	x	x
MW-7D	9939616		Aqueous	x	x
MW-8S	9939619		Aqueous	x	x
MW-8D	9939620		Aqueous	x	x
MW-4S	9939621		Aqueous	x	x
MW-4D	9939622		Aqueous	x	x
FB	9939623		Aqueous	x	x
MW-3	9939624		Aqueous	x	x
DUP	9939625		Aqueous	x	x
MW-9D	9939626		Aqueous	x	x
MW-9S	9939627		Aqueous	x	x
TRIP BLANK	9939628		Aqueous	x	x

B=BTEX/MTBE, P=PAH

Duplicates: DUP/MW-3

- Field Duplicates:** For the associated aqueous samples, an RPD of 20% was used as the QC limit for results >5x the CRQL; and for results <5x the CRQL, the difference between the two values must be less than the CRQL. Results <5x the CRQL have “NA”, not applicable, placed in the RPD field.

Compound	DUP	MW-3	RPD	Qualifier
<i>BTEX/MTBE</i>				
	ND	ND		
<i>PAH</i>				
Benzo(a)anthracene	0.3 J	0.03 J	NA	
Chrysene	0.03 J	0.03 J	NA	
Fluoranthene	0.7	0.7	0	
Pyrene	0.7	0.7	0	

ND=None Detected

## ORGANIC VALIDATION

### SUMMARY

All samples were successfully analyzed for all target compounds according to U.S. Environmental Protection Agency (USEPA) National Functional Guidelines for Organic Data Review, dated August 2014; Guidance for Labeling Externally Validated Laboratory Analytical Data for Superfund Use, dated January 2009; along with the Quality Assurance/Quality Control (QA/QC) requirements for the analytical methods used for the analyses. All instruments and method sensitivities were according to the specified analytical methods, except as noted in the Major Problem section. Refer to Minor Problems for information regarding biases identified during data validation.

Data Validation Summary

Parameters		B			P		
		q	t	a	q	t	a
*	Data Completeness		13	0		12	0
	Holding Time		13	0	x	12	1
*	Instrument Performance (BFB/DFTPP)		13	0		12	0
*	Calibrations		13	0		12	0
*	Laboratory and Field Blanks analyses		13	0		12	0
*	Surrogate Recoveries		13	0		12	0
*	Matrix Spike/Matrix Spike Duplicate		13	0		12	0
	Laboratory Control Sample(LCS)		13	0	x	12	10
*	Laboratory and/or Field Duplicates		13	0		12	0
*	Internal Standards		13	0		12	0
*	Compound Identification		13	0		12	0
*	Compound Quantitation		13	0		12	0
*	Sample Preservation		13	0		12	0
* All Criteria were met for that Parameter, B=BTEX/MTBE, P=PAH							

q=qualified; t=total number of samples analyzed; a=number of samples affected

### MAJOR PROBLEMS

- None noted.

### MINOR PROBLEMS

- **Laboratory Control Sample (LCS)/Holding Time:** The PAH LCS/LCSD associated with all samples displayed high recoveries for Phenanthrene & Fluoranthene. All samples were re-extracted and reanalyzed, except for samples 9939622 & 9939623 since no positive results for these compounds were detected the analysis. The samples were re-extracted 2-3 days outside the technical holding time of 7 days. The LCS/LCSD of the reanalysis displayed all recoveries within the QC limits. However, due to the exceedance of holding time, results for all samples were reported from the initial analyses, with positive results for these compounds qualified as "J+", unless superseded by the "J" qualifier. Positive results for all compounds that were detected in the reanalyses, but not in the initial analyses were reported on the EDDs and qualified accordingly. The re-extract for sample 9939621 were lost during the re-extraction by the laboratory, no reanalysis results for this sample.

## NOTES

- **Blank Contaminants:** The maximum concentration of all compounds found in the analyses of the trip, field or laboratory method blanks are listed in the following table. Associated samples with positive results of these contaminants maybe qualified "U1" or "J+", based on the concentration level found in the samples, according to USEPA National Functional Guideline for Organic Data Review, dated January 2017.

<i>Analytical Fraction</i>	<b>Compound</b>	Maximum Concentration	Units	Blank Type	Associated Samples
<i>BTEX/MTBE</i>	None				
<i>PAH</i>	None				

\*Common lab contaminant

- **Matrix Spike/Matrix Spike Duplicate (MS/MSD):** The PAH MS/MSD-RE of sample MW-7D displayed low recoveries for Anthracene & Benzene(a)pyrene. No positive results for these compounds were detected or reported for the parent reanalyzed sample.

## **REPORT CONTENT STATEMENT**

All data for this project were reviewed in accordance with the pertinent parts of the U.S. Environmental Protection Agency (USEPA) National Functional Guidelines for Organic Data Review, dated January 2017; Guidance for Labeling Externally Validated Laboratory Analytical Data for Superfund Use, dated January 2009; along with the Quality Assurance/Quality Control (QA/QC) requirements for the analytical methods used for the analyses. The text of the report addresses only those problems affecting data usability.

## **ATTACHMENTS**

- 1) Glossary of Data Qualifiers
- 2) Electronic Data Deliverable (EDD). These include:
  - (a) All results for target compounds with qualifier codes where applicable.
  - (b) All unusable detection limits (qualified "R"), where applicable.
- 3) Electronic Data Package (.pdf file) as Support Documentation

DCN: BC051901-BCH22

Respectfully Submitted,

*Sherif N. Mina*  
Sherif N. Mina

Date: *March 11, 2019*

QA/Review: *SM*

## **Appendix D: Electronic Data Deliverable (CD-ROM)**

---

